

cat. no. 104.04

Doors and casings

REVOLVING DOOR



Together with the casing, this metal revolving door represents one of the basic elements to construct clean workplaces and areas with maximum safety, sterility, hygiene, easy maintenance and sanitation.

PRODUCT DESCRIPTION

Facing

- The facing of the door leaf consists of a molded tile produced by precision molding.
- Reinforcements are glued-in along the perimeter of the facing, in order to increase the rigidity of the door leaf.
- Reinforcement and filler are glued together under pressure.


Door wing

- The door leaf is solid or glazed with the PHARMA system, offering double-sided glazing where the glass pane is in plane with the surface of the door leaf.
- It is possible to install blinds in the space between the glass panels.

Casing

- Mounting into the modular partition.

- Casing is in line with partition.

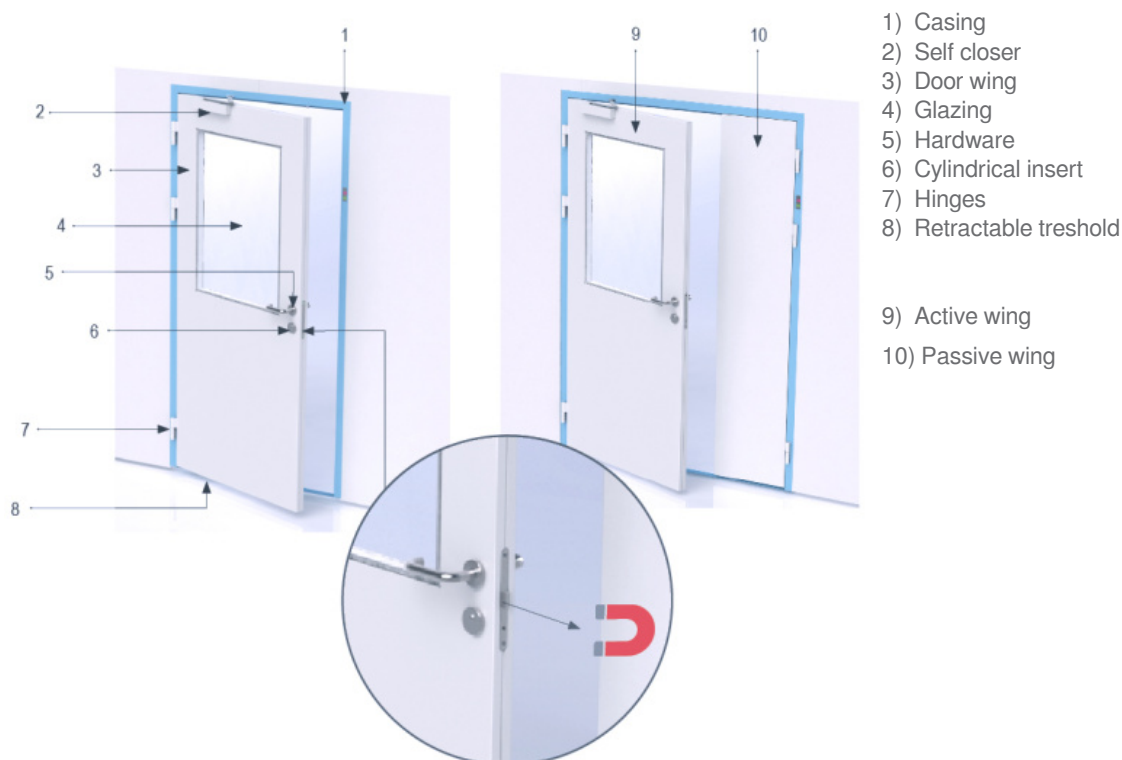

- 1) Casing
- 2) Self closer
- 3) Door wing
- 4) Glazing
- 5) Hardware
- 6) Cylindrical insert
- 7) Hinges
- 8) Retractable treshold

- 9) Active wing
- 10) Passive wing

ADVANTAGES

- Magnetic locks - tongue extends until closing and no damage to casing the paint.

TECHNICAL DATA

Door type
Hinged door
Swing direction
left
right
Finish
single wing
double wing
Door dimensions
1100x2010
1300 x 2010mm (active wing width 900mm)
1500 x 2010mm (active wing width 900mm)
1700 x 2010mm (active wing width 900mm)
700x2010
900x2010
In the case of an atypical active door wing, it is necessary to specify the dimensions of the active wing as part of the code. For example 1800/900/x2010 (clear width 1800, active wing 900, passive wing 900).
Door thickness
42 mm

Grounding for zone I and II

Earthing for zone I and II

Earthing has not been done

Atypical

Hinge type

Dr. Hahn

atypical

In the case of a different hue of the casing, the hinge is automatically of the same hue as the casing. Atypical finish - the customer requires a different hue than the casing - according to RAL colour standard.

Glazing size

usual glazing 400x920

solid door without glazing

atypical

Write an atypical dimension in a note.

In the case of double doors, only the active wing will be glazed.

Glazing glass type

laminated safety glass, thickness 6 mm

mirror glazing 2/3 on side of hinge 400x1450mm

mirror glazing on opposite side of hinge 400x1450mm

atypical

Mirror size 400x1450mm for all door sizes.

Blinds type

without blinds

magnetic blinds

mechanical blinds

atypical

Standard hue of blinds S156 (silver) according to the manufacturer's sample book, custom hues according to RAL colour standard.

Blinds location

on side of hinges

on opposite side of hinges

HVAC grille

without HVAC grille

grille 400x400 (VPR+VPK)

atypical

Standard colour finish is the colour of the door wing.

Type of door control

automatic operator

manual

door closer

atypical

I. Hardware - on the side of hinges

handle

fixed doorknob

elbow switch (S10-E)

one-point panic exit push device

sensor switch (S10-E)

button (S10-E)

operable doorknob

stainless steel plug

not included in delivery

atypical

II. Hardware - on the opposite side of hinges

handle

fixed doorknob

elbow switch (S10-E)

one-point panic exit push device

sensor switch (S10-E)

button (S10-E)

operable doorknob

stainless steel plug

not included in delivery

atypical

Cylindrical insert

openings for lock and insert have not been cut out

standard cylindrical insert

not included in delivery

atypical

For S10-E it is always C0 - the opening is not cut out.

Drop seal

without strip

Dropseal ELLEN MATIC 2K

atypical

Protective bumper, kick plate - dimensions and finish must be specified in the notes to the door order.

Indication

Without indication

with indication on the right on side without hinges SP-OZ

with indication on the right on side of hinges SP-PZ

with indication on the left on side without hinges SL-OZ

with indication on the left on side of hinges SL-PZ

with double-sided indication on the left SP-O/P

with double-sided indication on the right SP-O/P

atypical

Door wing blocker

without el. blocker

electromechanical solenoid lock ST-DB 100

atypical

Facing hue and material

Galvanized metal sheet, hue RAL 9016

Stainless steel AISI 304

Powder coating (Komaxit), hue RAL

RAL anti-bacterial varnish

atypical design

In the case of different door wing facings, it is necessary to specify the hue as atypical, and to provide more details in the notes.

Casing hue and material

Galvanized metal sheet, powder coating (Komaxit), hue RAL 9016

Stainless steel AISI 304

Galvanized metal sheet, powder coating (Komaxit), hue RAL

RAL anti-bacterial varnish

Atypical design

Type design

Atypical design

Type design

0 - Unique specification out of offered versions

Atypical design

Q - atypical design that cannot be uniquely specified by a code

MORE INFORMATION, PHOTOS

