

cat. no. 104.01

Doors and casings

REVOLVING DOOR-H



Together with the casing, this metal revolving door represents one of the basic elements to construct clean workplaces and areas with maximum safety, sterility, hygiene, easy maintenance and sanitation.

PRODUCT DESCRIPTION

Facing


- The facing of the door leaf consists of a molded tile produced by precision molding.
- Reinforcements are glued-in along the perimeter of the facing, in order to increase the rigidity of the door leaf.
- Reinforcement and filler are glued together under pressure.

Door wing

- The door leaf is solid or glazed with the PHARMA system, offering double-sided glazing where the glass pane is in plane with the surface of the door leaf.
- It is possible to install blinds in the space between the glass panels.

Casing

- Mounting into the partition.
- Casing is in line with partition.

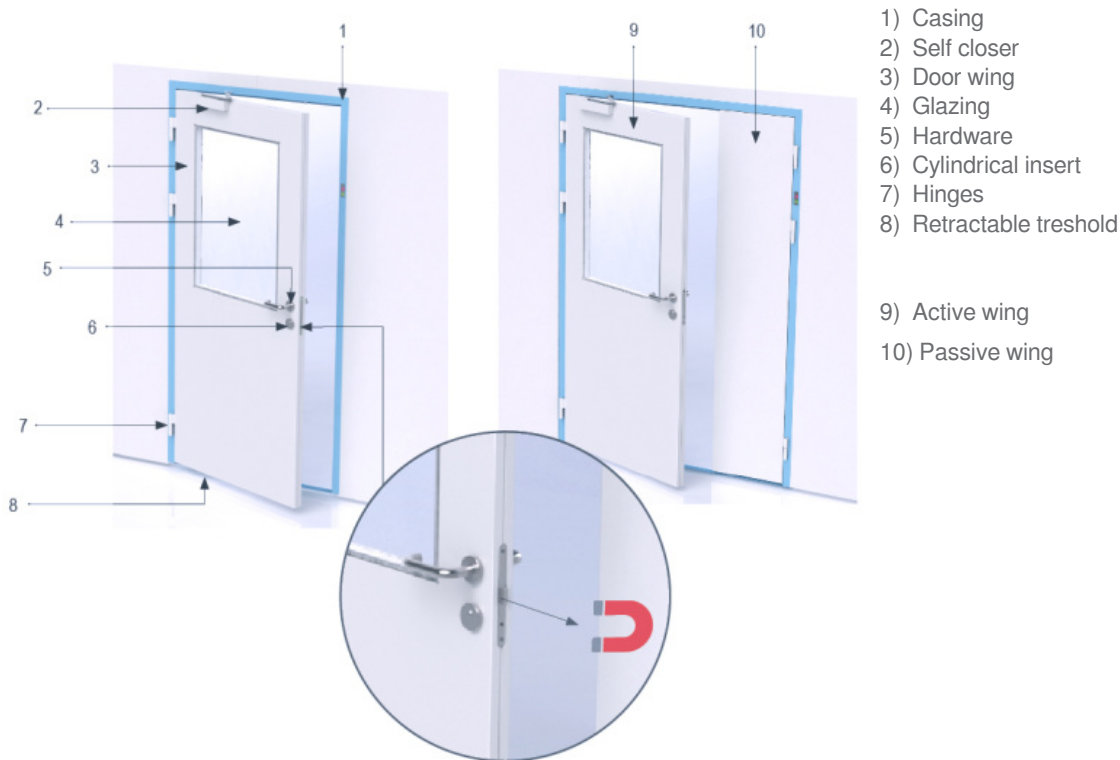

- 1) Casing
- 2) Self closer
- 3) Door wing
- 4) Glazing
- 5) Hardware
- 6) Cylindrical insert
- 7) Hinges
- 8) Retractable threshold

- 9) Active wing
- 10) Passive wing

ADVANTAGES

- Magnetic locks - tongue extends until closing and no damage to casing the paint.

TECHNICAL DATA

Door type	
basic hinged door H	
Swing direction	
left	
right	
Finish	
single wing	
double wing	
Door dimensions	
1100x2010	
1300x2010mm (active wing width 900mm)	
1500x2010mm (active wing width 900mm)	
1700x2010mm (active wing width 900mm)	
700x2010	
900x2010	
In the case of an atypical active door wing, it is necessary to specify the dimensions of the active wing as part of the code. For example 1800/900/x2010 (clear width 1800, active wing 900, passive wing 900).	
Door thickness	
thickness	value
42 mm	for partition 52 mm

Grounding for zone I and II

Earthing for zone I and II

Earthing has not been done

Atypical

Hinge type

Dr. Hahn

Atypical

In the case of a different hue of the casing, the hinge is automatically of the same hue as the casing. Atypical finish - the customer requires a different hue than the casing - according to RAL colour standard.

Glazing size

usual glazing 400x920

solid door without glazing

atypical

The atypical dimension of the glazing should be noted in the note.
In the case of double doors, only the active wing will be glazed.

Glazing glass type

laminated safety glass, thickness 6 mm

mirror glazing 2/3 on side of hinge 400x1450mm

mirror glazing on opposite side of hinge 400x1450mm

atypical

Mirror size 400x1450 mm for all door dimensions.

Blinds type

without blinds

magnetic blinds

mechanical blinds

atypical

Standard hue of blinds S156 (silver) according to the manufacturer's sample book, custom hues according to RAL colour standard.

Blinds location

on side of hinges

on opposite side of hinges

HVAC grille

without HVAC grille

grille 400x400 (VPR+VPK)

atypical

Standard colour finish is the colour of the door wing.

Type of door control

automatic operator

manual

door closer

atypical

Warning - in the case of double wing door with self-closers on both wings, the door closing coordinator shall be specified.

I. Hardware - on the side of hinges

handle

fixed doorknob

elbow switch (S10-E)

one-point panic exit push device

sensor switch (clean switch)

button (S10-E)

operable doorknob

stainless steel plug

not included in delivery

atypical

II. Hardware - on the opposite side of hinges

handle

fixed doorknob

elbow switch (S10-E)

one-point panic exit push device

sensor switch (clean switch)

button (S10-E)

operable doorknob

stainless steel plug

not included in delivery

atypical

Cylindrical insert

openings for lock and insert have not been cut out

standard cylindrical insert

not included in delivery

atypical

For S10-E it is always C0 - the opening is not cut out.

Drop seal

Dropseal ELLEN MATIC 2K

without strip

atypical

Protective bumper, kick plate - dimensions and finish must be specified in the notes to the door order.

Casing mounting

finish for a plasterboard wall (HSE)

finish for a double partition

finish for partition panels

finish for Surgical

atypical

When ordering door frames type "H" in the company HSE, it is necessary to state in the order: Door frames H DZD for FOR CLEAN

Casing thickness

52 mm

100 mm

145 mm

in the case using of the additional 25 mm column MS-156, it is necessary using of notes:

1 - additional column on the hinge side

2 - additional column on the opposite side of the hinges

Indication

Without indication

with indication on the right on side without hinges SP-OZ

with indication on the right on side of hinges SP-PZ

with indication on the left on side without hinges SL-OZ

with indication on the left on side of hinges SL-PZ

with double-sided indication on the left SP-O/P

with double-sided indication on the right SP-O/P

atypical

Door wing blocker

without el. blocker

electromechanical solenoid lock ST-DB 100

atypical

Facing hue and material

Galvanized metal sheet, hue RAL 9016

Stainless steel AISI 304

Powder coating (Komaxit), hue RAL

RAL anti-bacterial varnish

atypical design

In the case of different door wing facings, it is necessary to specify the hue as atypical, and to provide more details in the notes.

Casing hue and material

Galvanized metal sheet, powder coating (Komaxit), hue RAL 9016

Stainless steel AISI 304

Galvanized metal sheet, powder coating (Komaxit), hue RAL

RAL anti-bacterial varnish

Atypical design

Type design

Atypical design

Type design

0 - Unique specification out of offered versions

Atypical design

Q - atypical design that cannot be uniquely specified by a code

MORE INFORMATION, PHOTOS

